


DIMENSIONS UNIT: mm

NOMINAL SIZE	d	H	D1	L	d2	S1	L1
1/8	4.5	31	60	32	Rc 1/8	16	16
1/4	4.5	31	60	39	Rc 1/4	17	19
3/8	6.8	36	70	44	Rc 3/8	21	21
1/2	9.2	41	85	56.5	Rc 1/2	25	27.5
3/4	12.5	44	85	59	Rc 3/4	32	30
1	16	48	100	71	Rc 1	38	36
1.1/4	20	54	100	78	Rc 1.1/4	49	40
1.1/2	24.5	65	125	83	Rc 1.1/2	53	42.5
2	32	72	125	100	Rc 2	67	51

NOTE (1) DEZINCIFICATION RESISTANT BRASS.
 (2) Cr PLATING.
 (3) PLASTIC COVERING.
 (4) VALVE SIZE IDENTIFICATION.
 (5) DON'T USE FOR FLAMMABLE GAS OR TOXIC GAS.

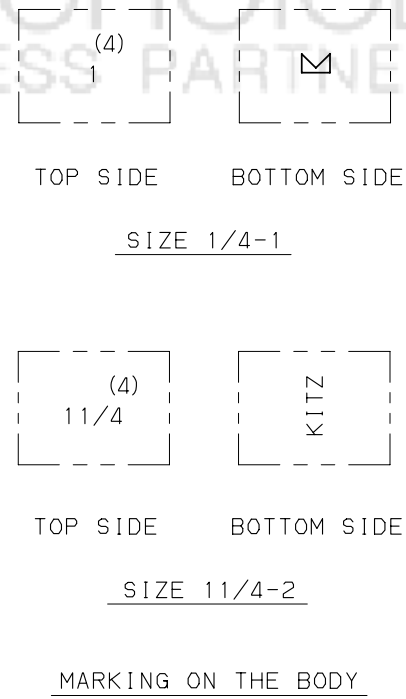

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
				JIS SPEC.
1	BODY	1	FORGED BRASS	C3771BE
2	BODY CAP	1	BRASS ROD	C3604BD
				(SIZE 1/8 ONLY)
3	STEM	1	SPECIAL BRASS (1)	
4	BALL	1	FORGED BRASS (2)	C3771BE
7	GLANND	1	STAINLESS STEEL	SUS430
8	GLAND PACKING	1	G/F PTFE	
9	HANDLE	1	STAINLESS STEEL (3)	SUS430
10	HANDLE NUT	1	CARBON STEEL	SS400
16	SPRING WASHER	1	CARBON STEEL	SK5
29	INSERT	1	FORGED BRASS	C3771BE
				(SIZE 1/4-2)
30	BALL SEAT	2	G/F PTFE	
43	SPRING	1	STAINLESS STEEL	SUS304-CSP
47	THRUST WASHER	1	REINFORCED PTFE	

STANDARD	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	JIS B0203
	WALL THICKNESS	KITZ STANDARD
	PRESSURE TEST	KITZ STANDARD
	FIGURE	TK

TYPE 600 FORGED BRASS
 BALL VALVES
 REDUCED BORE, SCREWED ENDS.

DATE APPD	JAN.30.'09	DRAWING NO	△		
APPD BY	M. TAKUSAGAWA		△		
CHKD BY	I. TAKANO	925-C60026	△		
DSGND BY	K. NAKAI	REV-07	△		
DRAWD BY	Y. ASAKAWA		MARK	DATE	BY

KITZ CORPORATION

