

스트레이너

STRAINER

MODEL : S-1028

TYPE : Flange, Y type




Specification | 사양

WORKING PRESSURE (사용압력)		WORKING PRESSURE (사용압력)	
Steam, Oil 350°C	2Mpa	Body	3Mpa
Steam, Oil 350°C	2.4Mpa		
Steam, Oil 350°C	2.7Mpa		
Cold Water, Oil or Gas Non Shock	3Mpa		

Dimension | 표준성능 및 규격

SIZE (호칭규격)	DIA (구경) d	FACE TO FACE (면간거리) L	FLANGE (플랜지)					CENTER TO TOP (중심에서 상방높이) H
			D	C	g	t	n-h	
15A	15	140	95	70	51	14	4-15	68
20A	20	140	100	75	56	16	4-15	77
25A	25	160	125	90	67	16	4-19	91
40A	40	210	140	105	81	18	4-19	154
50A	50	250	155	120	96	18	8-19	170
65A	65	285	175	140	116	20	8-19	220
80A	80	320	200	160	132	22	8-23	270

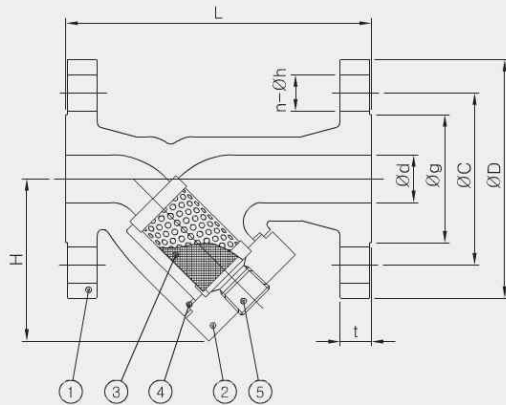

Material | 재질

NO	PARTS NAME	MATERIAL
1	BODY	CAST STEEL
2	BONNET	DUCTILE
3	SCREEN	60 MESH STAINLESS NET
4	PACKING	PTFE
5	PLUG	DUCTILE